


5G6 + 1x0,75 MM2 H07BZ5-F EV CABLE DATA SHEET

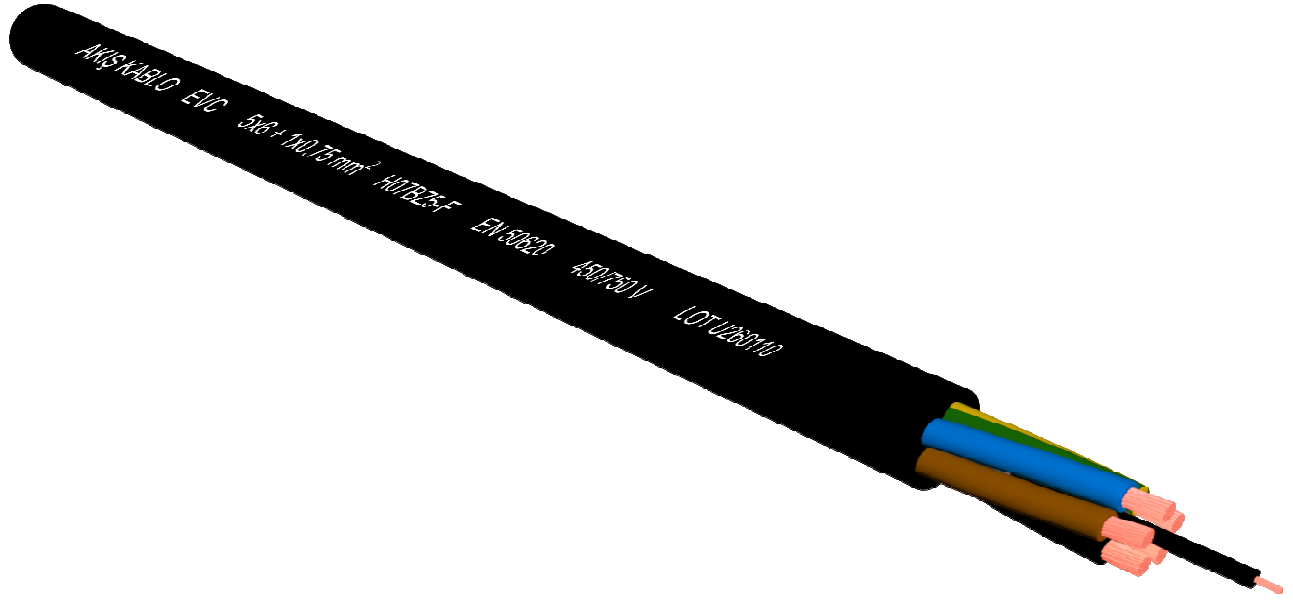

EN 60228 CLASS-5 STRANDED ELECTROLYTIC BARE COPPER	Section	Construction	Max Resistance
	6	75X0,30	3.30 Ohm/m
	0,75	24x0,19 mm	26.0 mOhm/m
CORE INSULATION	Material	EN 50620 EVI-1 HFFR X	
	Standard	EN 50620	
	Elongation	> % 300	
	Tensile Strenght	> 15 N/mm ²	
	Fire Performance	EN 60332-1-2	
	Diameter	4,45 - 2,50 +/- 0,05 mm	
	Working Temp	EN 50363-3 T5 (-40 / + 100)	
	Test Voltage	2000 V	
COVER INSULATION	Material	EN 50620 EVM-1 HFFR X	
	Type	EN 50620	
	Elongation	> % 300	
	Tensile Strenght	> 20 N/mm ²	
	Fire Performance	EN 60332-1-2	
	Diameter	16.0 mm (+/- 0,2 MM)	
	Working Temp	EN 50363-3 TM4 (-40 / + 100)	
	Resistance Against Chemicals	EN 50620	
	Color	BLACK	
PACKAGING	500/1000 M WOOD REEL		
PRODUCTION FACILITY STANDARD	TS EN ISO 9001:2015		
QUALITY CERTIFICATION	HAR ,CE, REACH, ROSH, Pb FREE		