

FLAME RESISTANT MOTOR
CONTROL CABLE
4x(4+1.5) + 7x 0,22 mm²

ELEVATOR CABLE WITH SERIAL
COMMUNICATION

SIGNAL CONTROL CABLES

 **FLEX CAB**

www.akiskablo.com



 **AKISKABLO**




www.flexcab.com.tr

COMPANY ADVERTISING

- Our Company; It started production in 2011.
- Since 2016, it continues its activities in our 20.000 m2 open and 6000 m2 closed facility.
- It has responded to the needs of the sector by obtaining the <HAR> certificate of conformity for the first high speed elevators in Turkey.
- Especially in order to meet the cable systems for the elevator sector ;
- Flat Flexible Cables,
- Control Cables,
- Encoder Cables,
- FE 180 flame resistant multi motor supply and control cables, patented by our company,
- Installation Cables produce PVC/HFFR/FE 180 specifications.



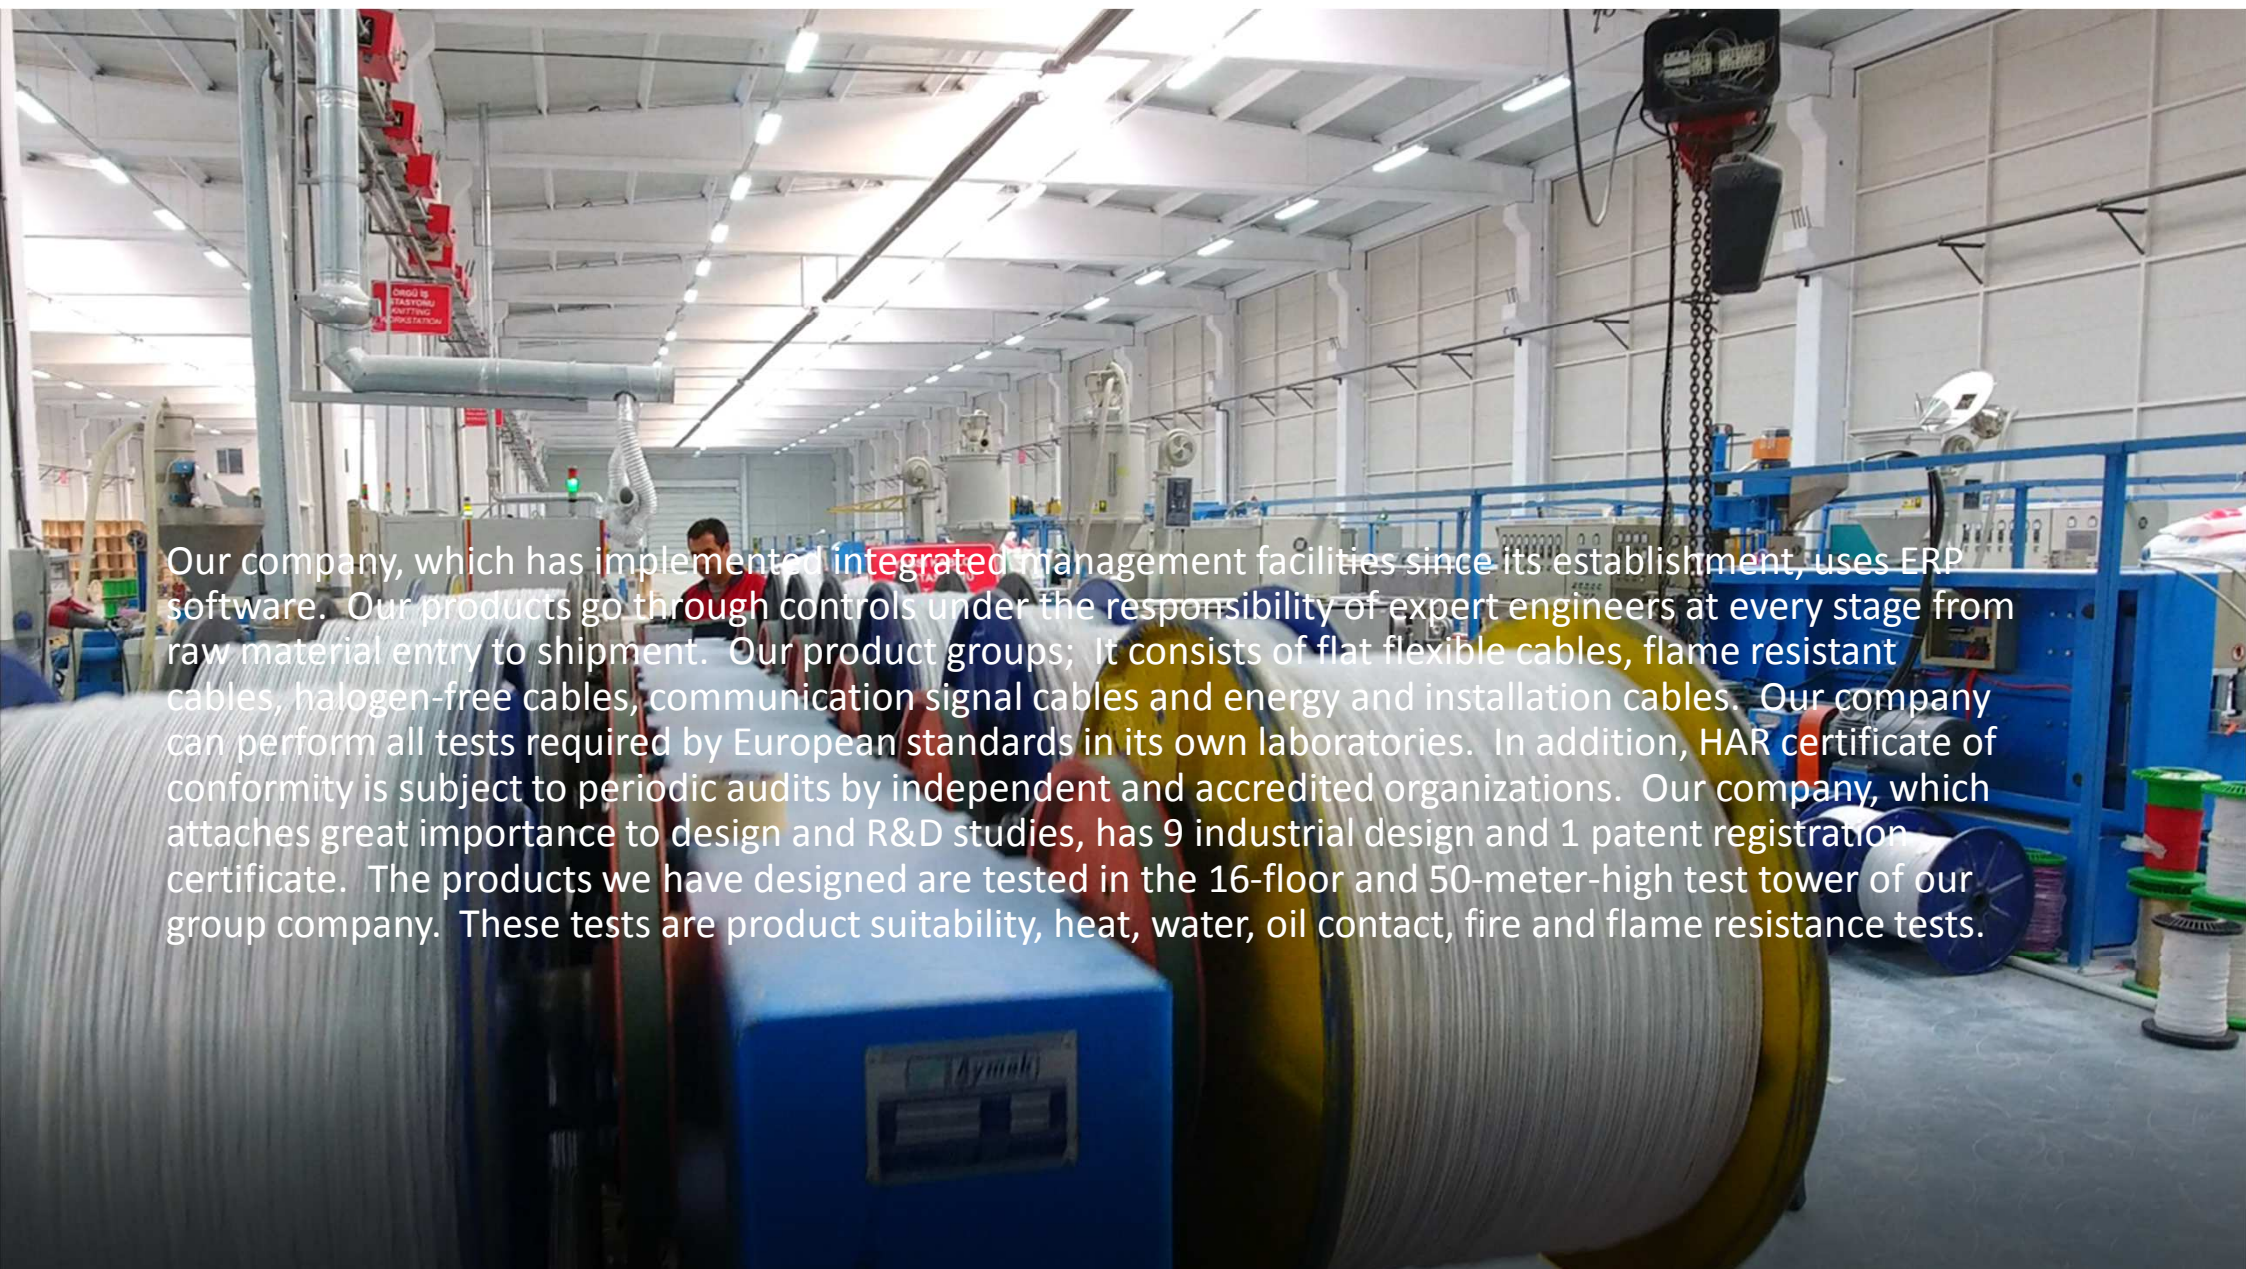

Our company, which has implemented integrated management facilities since its establishment, uses ERP software. Our products go through controls under the responsibility of expert engineers at every stage from raw material entry to shipment. Our product groups; It consists of flat flexible cables, flame resistant cables, halogen-free cables, communication signal cables and energy and installation cables. Our company can perform all tests required by European standards in its own laboratories. In addition, HAR certificate of conformity is subject to periodic audits by independent and accredited organizations. Our company, which attaches great importance to design and R&D studies, has 9 industrial design and 1 patent registration certificate. The products we have designed are tested in the 16-floor and 50-meter-high test tower of our group company. These tests are product suitability, heat, water, oil contact, fire and flame resistance tests.



Our Quality

- In our production facility with ISO 9001:2015 Quality Management System certified by TSE;
- 9 piece Industrial Designs
- 1 piece patent
- 6 piece TSE <HAR> Suitability
- 2 piece TSE Suitability
- 1 piece TSEK Suitability
- It has a certificate.



Laboratuvarımız



Within Our Company;

- 5 Electrical and Electronics Engineers,
- 1 Industry Engineer,
- 1 Mechanical Engineers,
- 1 Metallurgical Engineer,
- 1 Computer Engineer

Our company with its staff in laboratory;

- Physical Tests (Break and Elongation),
- Dilution,
- Electrical tests,
- Lifetime tests,
- Flame resistance,
- Resistance,
- Flexibility,
- Insulation,
- The tests are carried out in accordance with harmonized standards.

CPR

- All products,
- 2011/305/AB Regulation ,
- TS EN 50575+A1,
- TS EN 60332-1-2
- It has a Declaration of Performance (DOP) in accordance with its standards.




Our Registered Brands



Fairs

Our company; national and international participate in sectoral fair and introduce to variety the sector

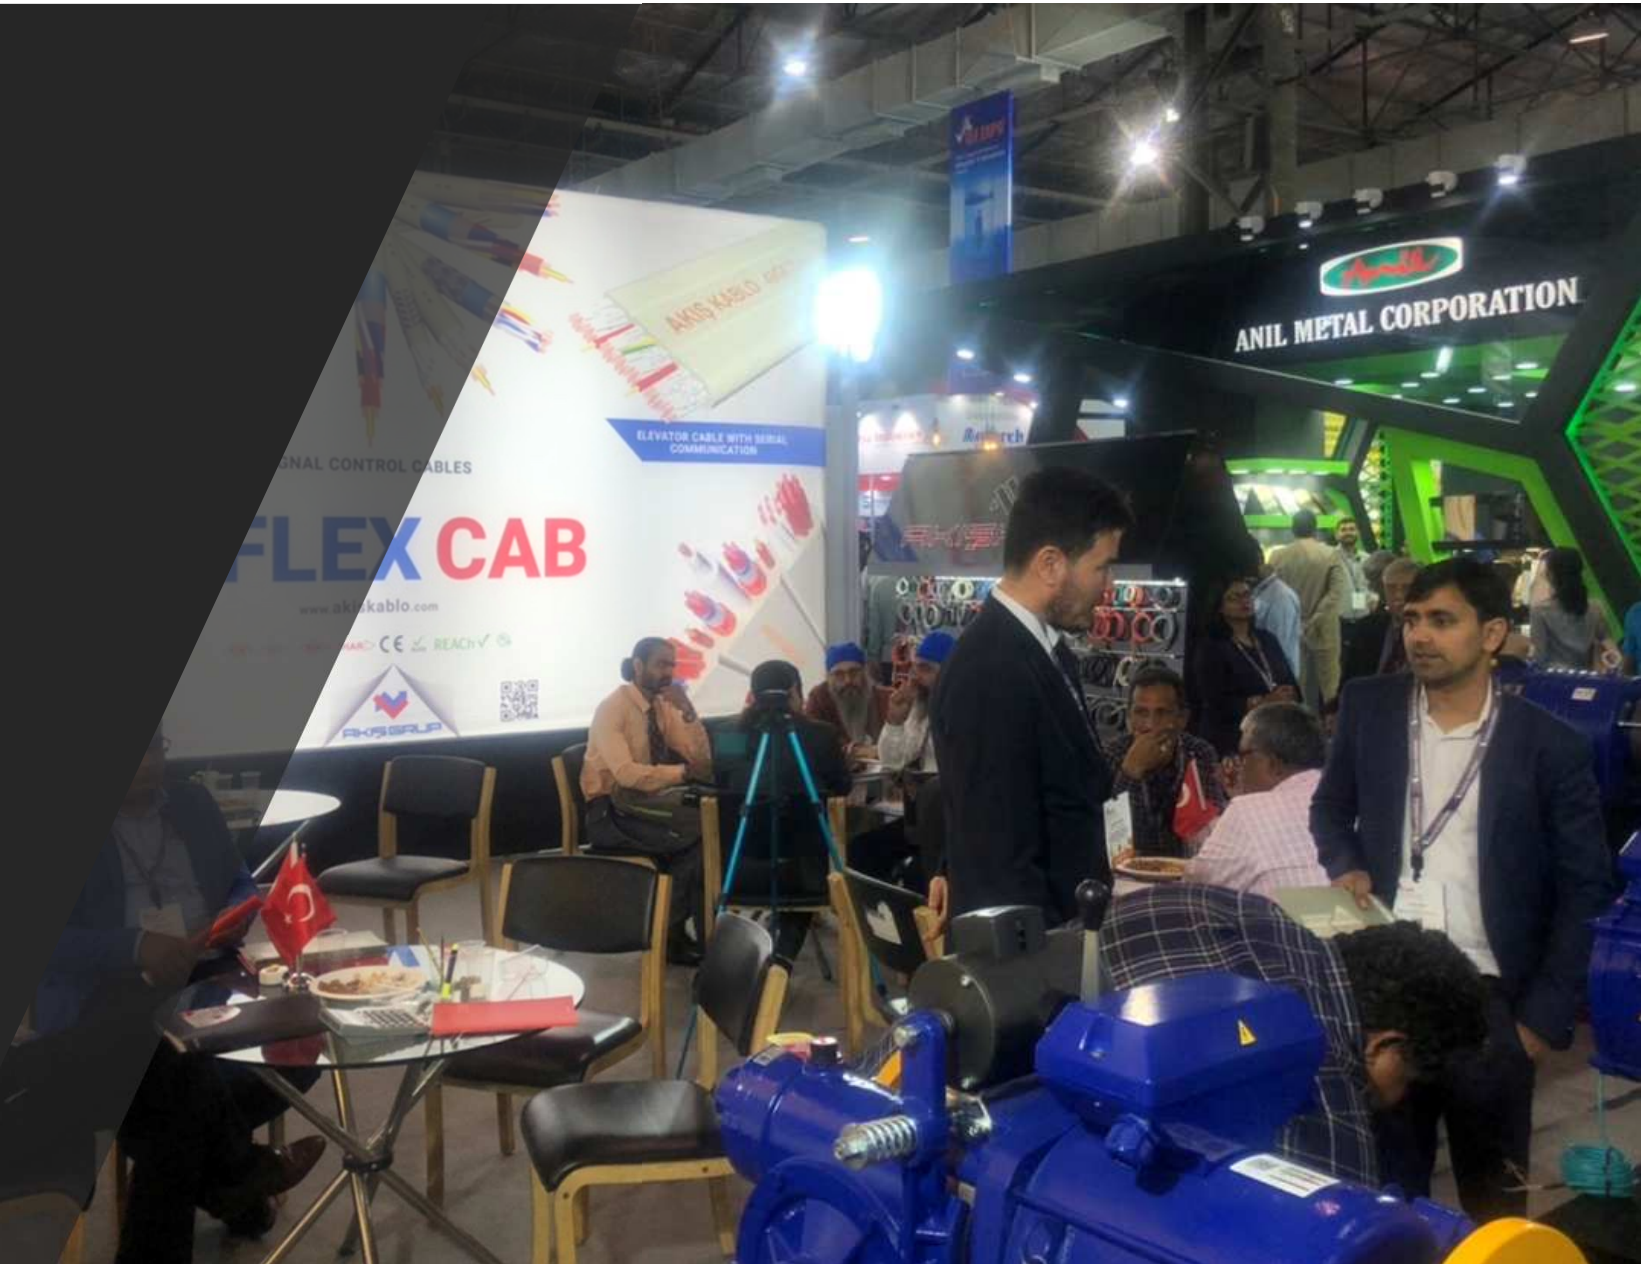


Export

Our company exports its products to more than 30 countries.





Our Certificate

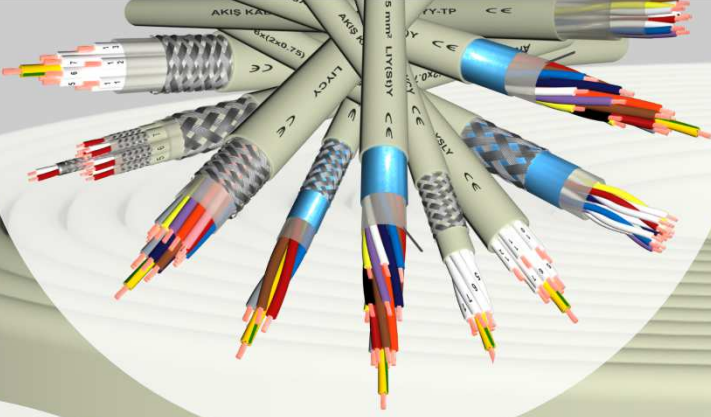

Endüstriyel Patenti
Akış Kablo'ya
Ait Ürün

22X0.75 mm²

H05VVD3H6-F

300/500 V

FlexCAB



Products



2020/5/2 08:44

Flat Flexible Cables

- Compliant with EN 50214 Standard,
- Flat Cables from 12 cores to 56 cores (H05VVH6-F)
- Serial Communication Flat Cables(A05VVH6-F)
- Halogen Free HFFR Flat Cables (H05Z1Z1H6-F)
- Flexible Halogen Free HFFR Straight (H05Z1Z1H6-F)
- Flat for High Speed Elevators cables (H05V3V3H6-F)
- Flat Cables for Long Distance Elevators (H05V3V3D3H6-F)

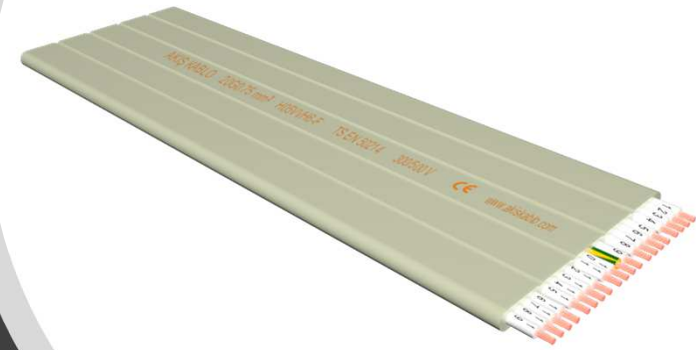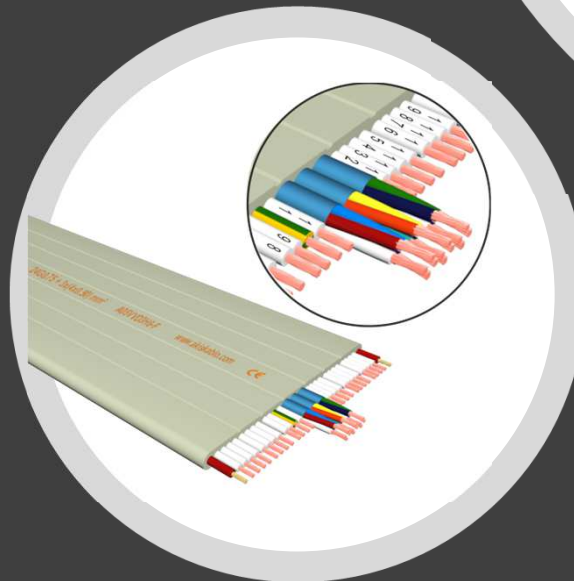




Control Cables

- Compliant with TS 13755 and TSEK 373 Standards,
- In sections from 0.22 to 16 mm;
- From 2 cores to 40 cores,
- PVC ve Halogen Free (HFFR), Flame Resistant,
- Colourful (LIYY, LIHH),
- Digit coded(YSLY, HSLH),
- Shielded cables(LIHCH, LIYCY, YSLCY, HSLCH),
- FE 180 Flame Resistant Cables(NX2H),
- Encoder Signal Cables(LIYCY-CY)


Flame Resistant Cables

- In sections from 1 to 16 mm²;
- 2 to 5 veins;
- With screen
- According to IEC 60331-21 Standard;
- FE 180 (Circuit integrity continues under fire at 700 C and min.180 minutes.)

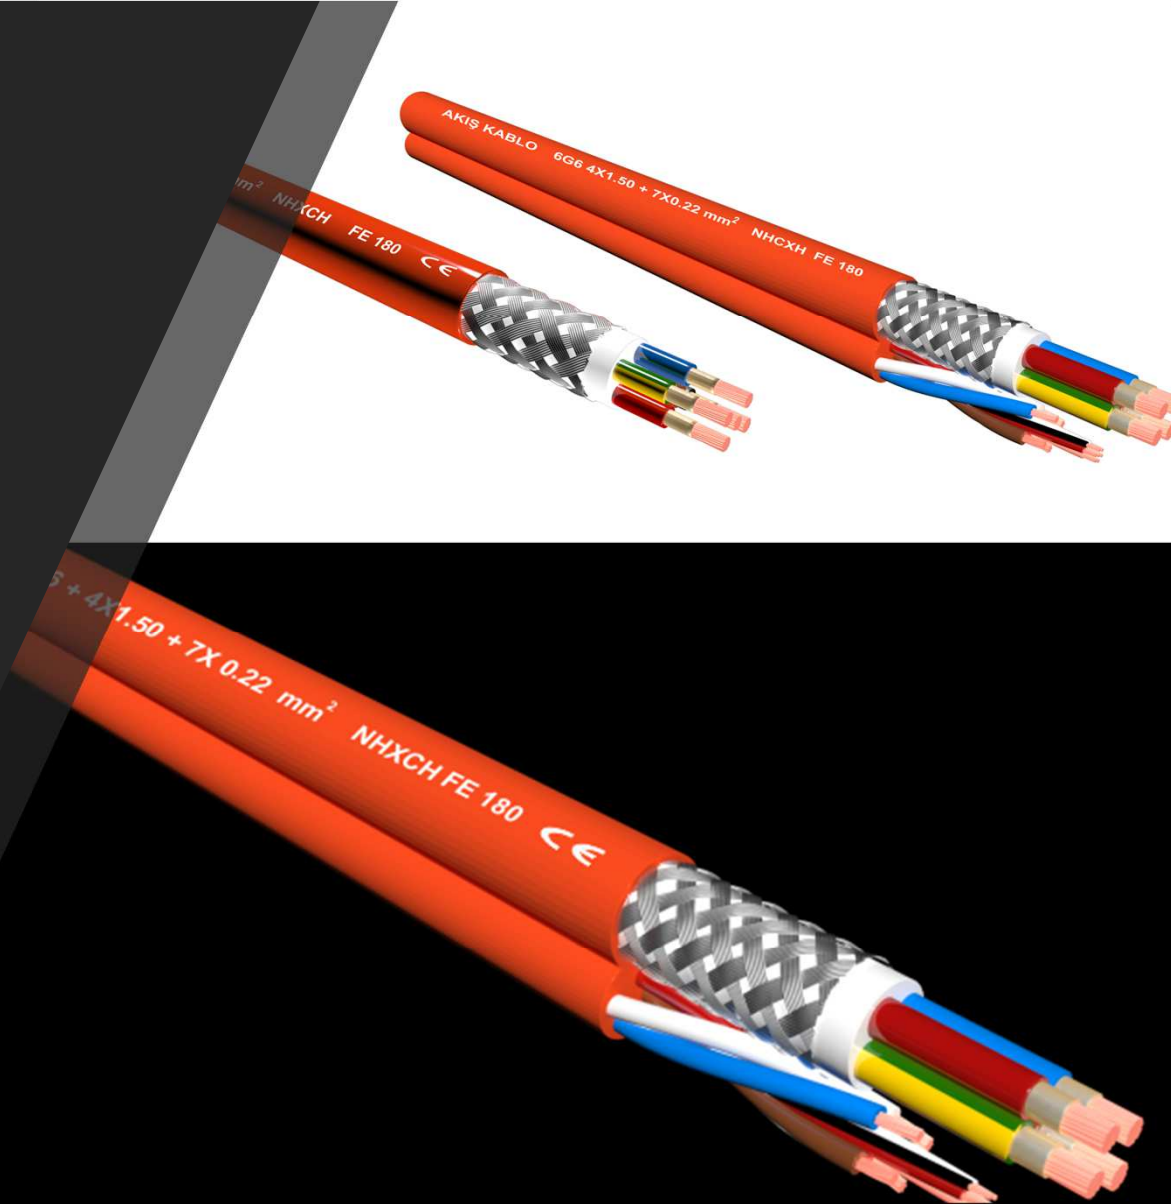


Energy Cables

- Compliant with EN 50525-2-11 and EN 50525-3-11 Standards,
- In sections from 1 to 16 mm²,
- Between 2 and 5 veins,
- With screen,
- PVC ve HFFR (Halogen Free), Flame Resistant(XLPE)
- H05VV-F, H05Z1Z1-F

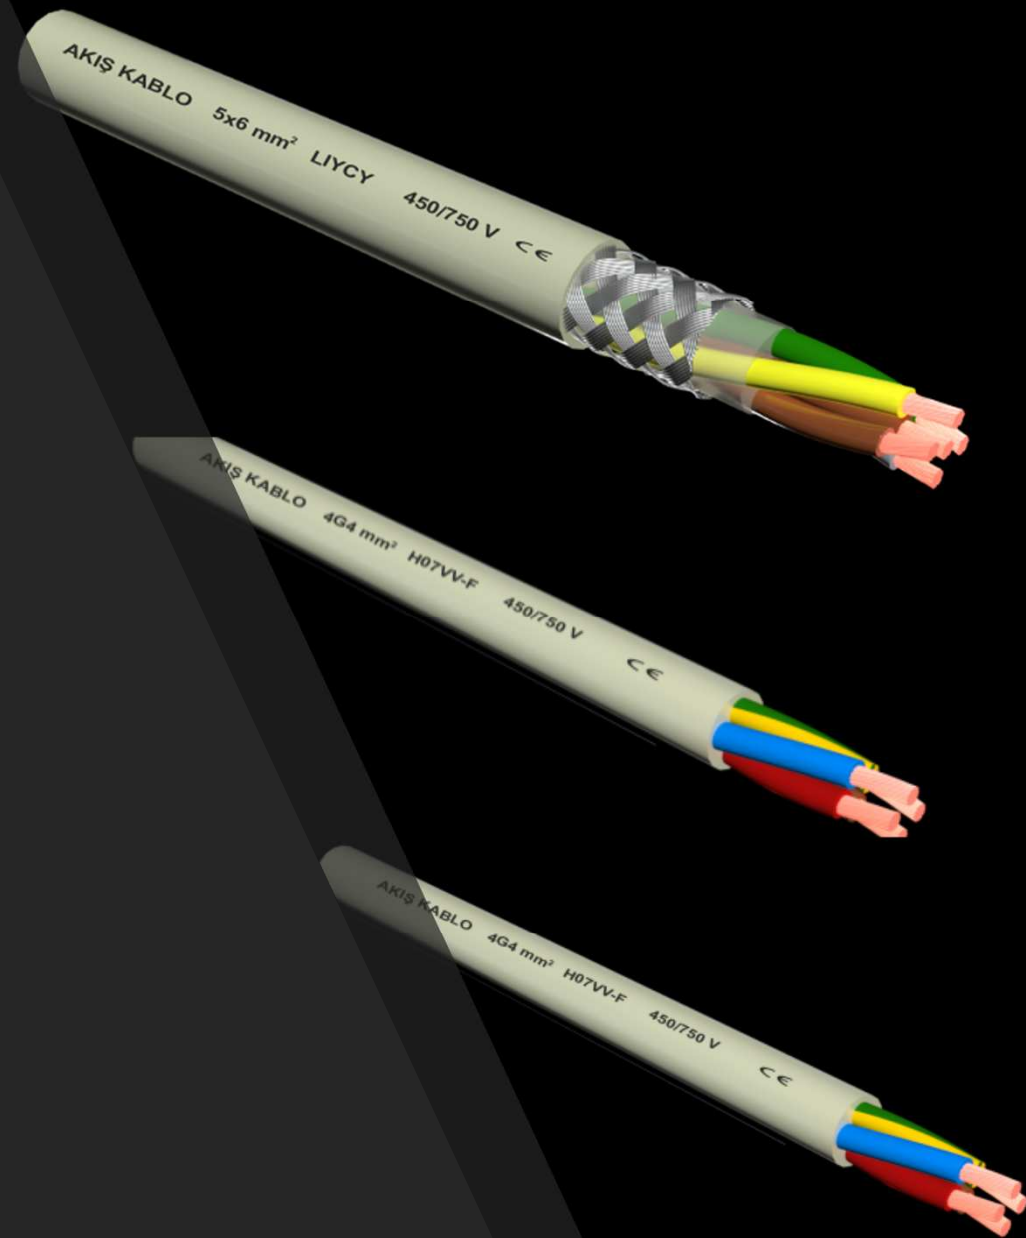

Installation Cables

- EN 50525-2-31 and
- Compliant with EN 50525-3-31 Standards;
- 0.50-16 mm² Sections,
- Mono and Twisted Multi-Wire,
- PVC and HFFR (Halogen Free)
- 13 Colors
- H05V-K, H05V-U, H05Z1-K, H05Z1-U
- H07V-K, H07-U, H07Z1-K, H07Z1-U

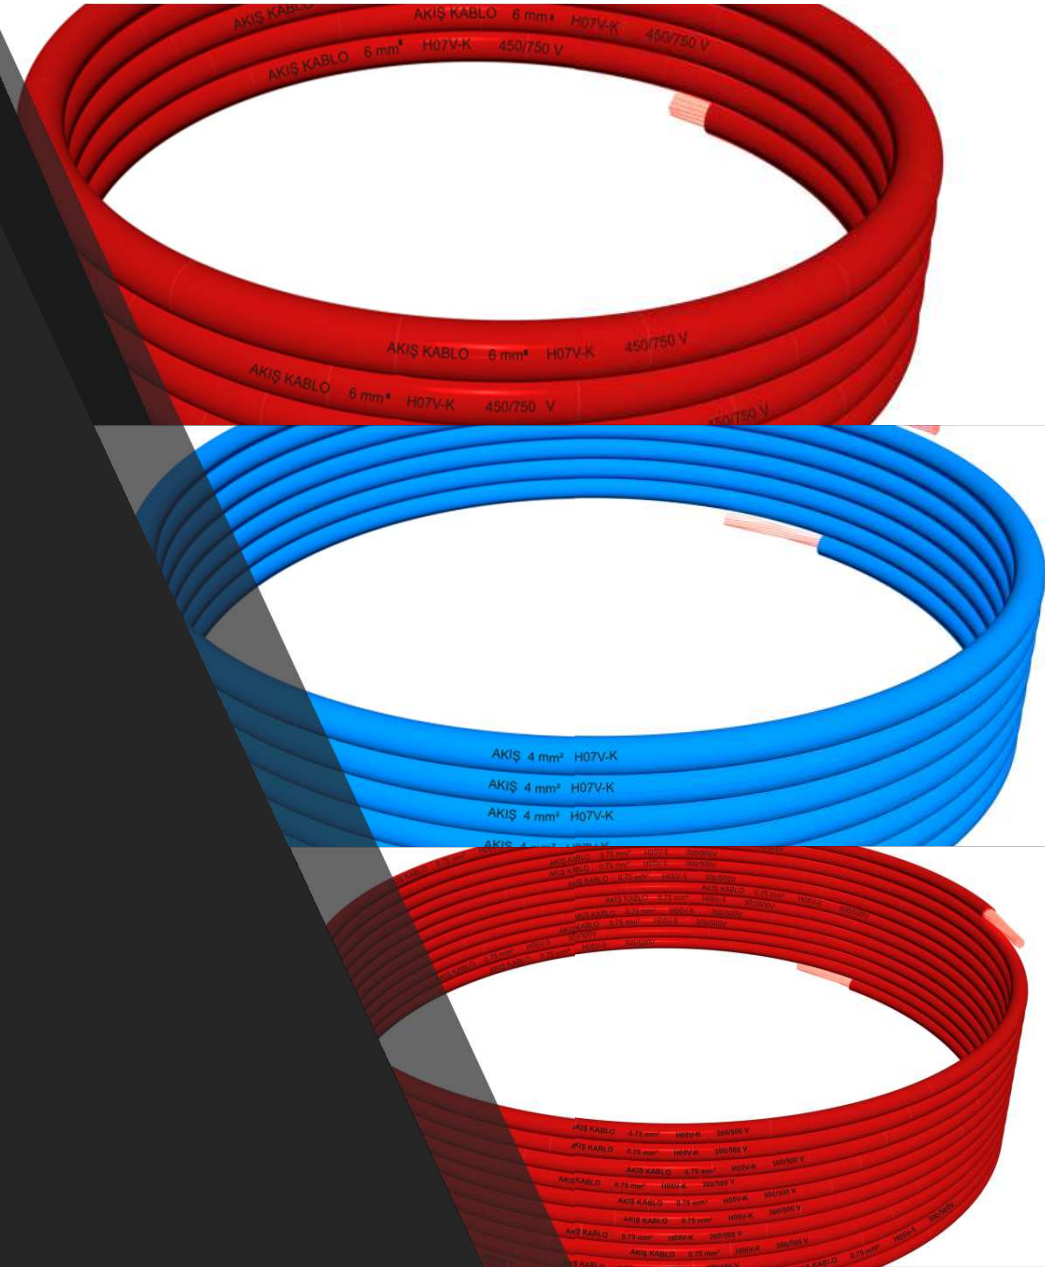


PUR Spiral Cables

TPU Cover,

2x – 20x


0,25- 1.00 mm²

LIYY, LIYCY

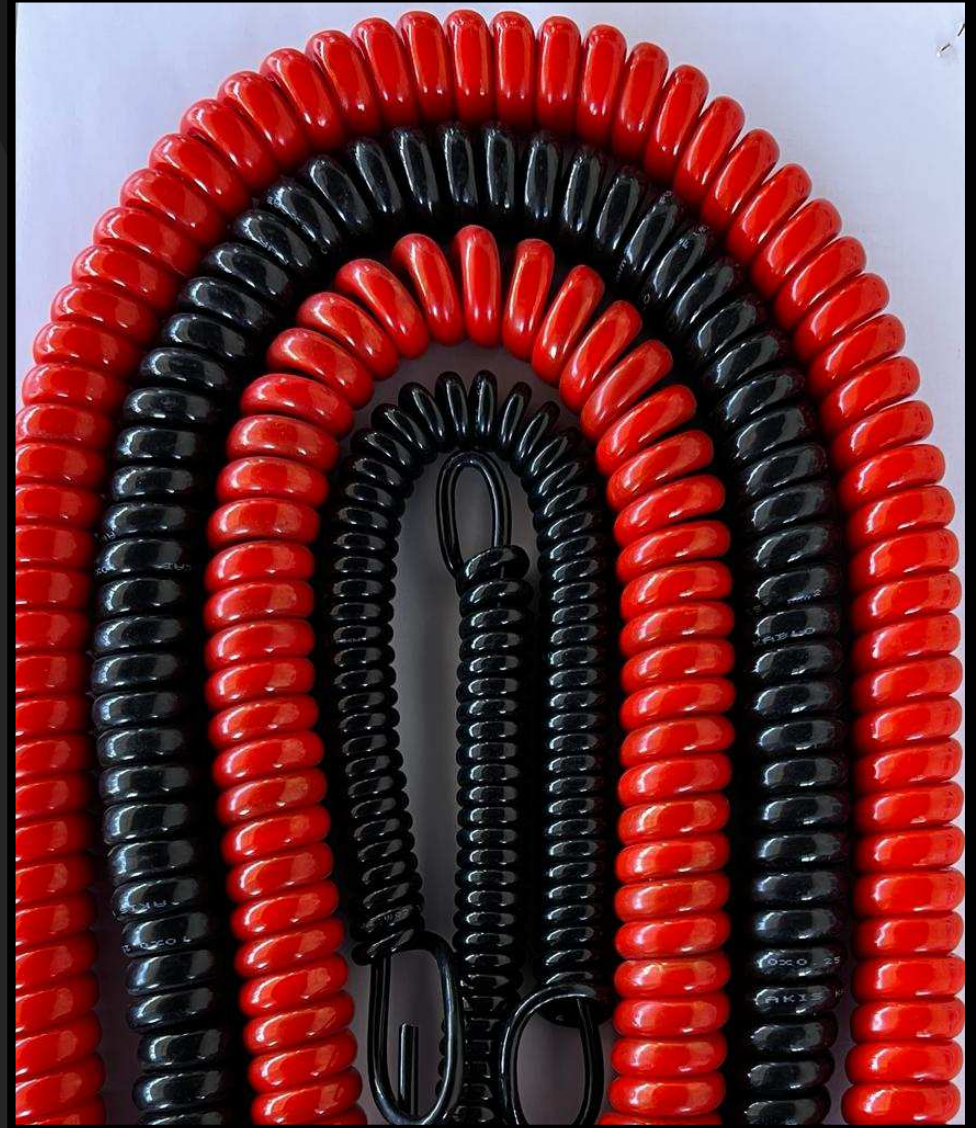


Automotive Cables

- Compliant with ISO 6722-1 (-40 C/+105 C)
- FLRYB
- FLRYY/B
- FLY/B
- FLYY/B
- FLRYnx/B

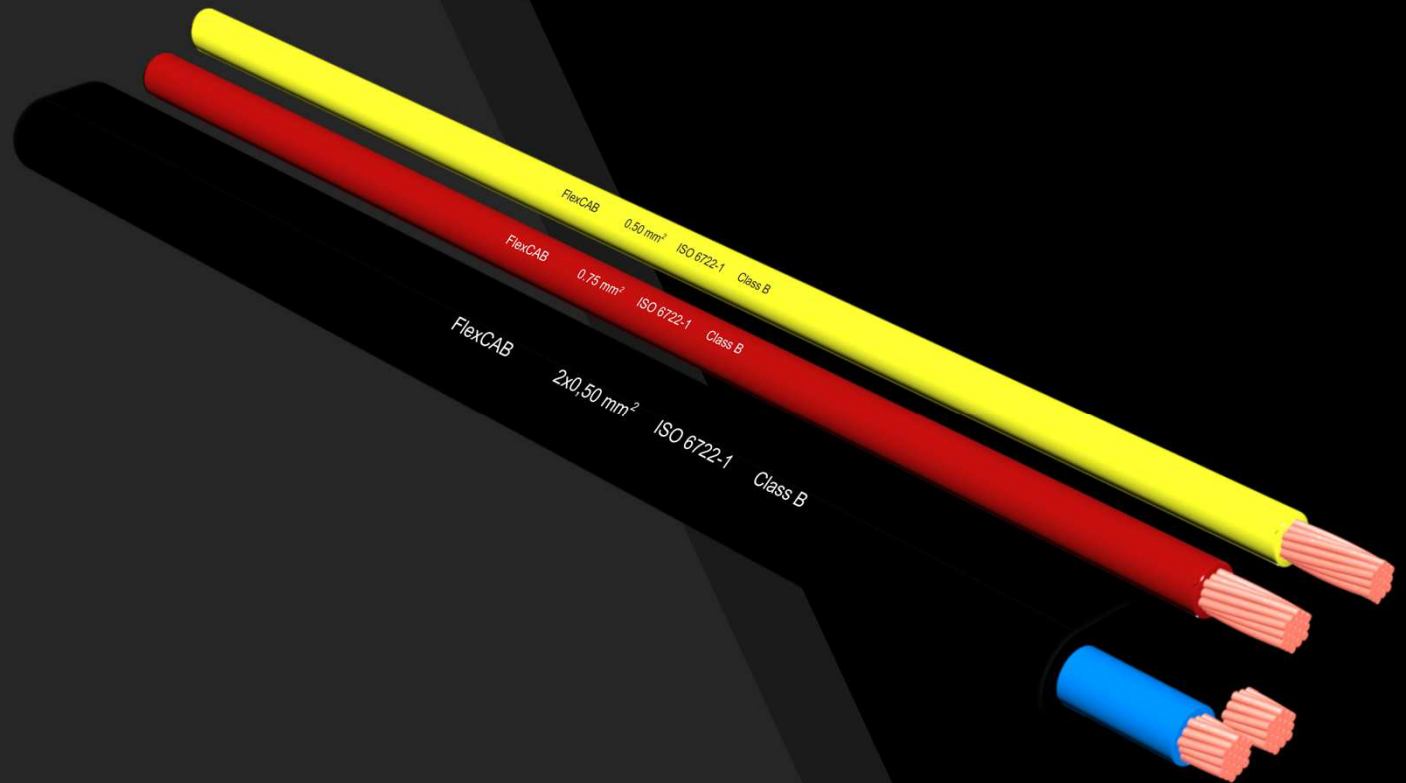

Signal Control Cables

LI2Y(St)CY,
LIY(St)CY,
LI2Y(St)Y

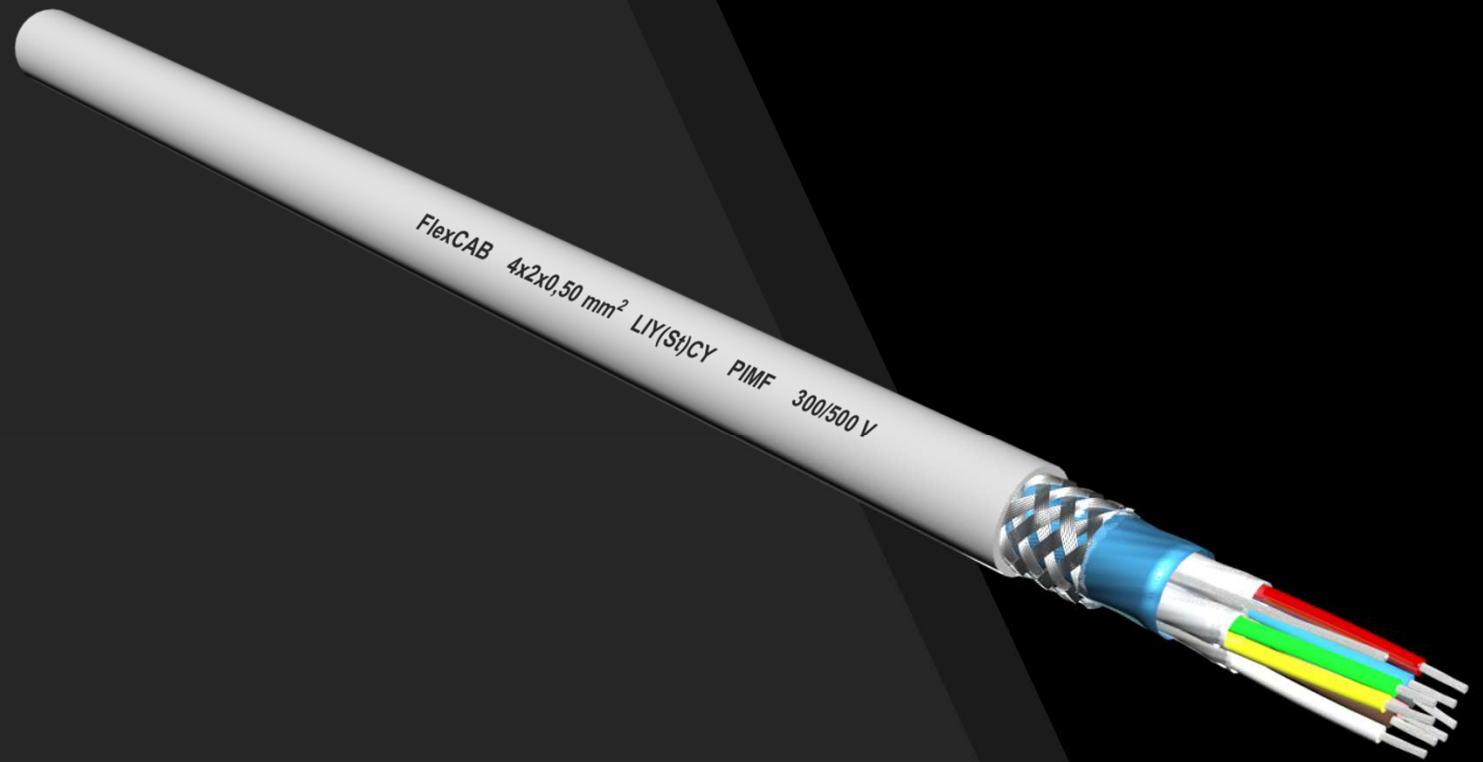



Akış Kablo San Tic. Ltd. Şti.

- **Factory :**
- 4. Organize Sanayi Bölgesi Kayacık Mah. 407. Sokak No:3 Selçuklu/KONYA/TURKIYE
- **TEL** : + 90 332 239 06 48
- **FAX** : + 90 332 239 06 48
- **Mobil** : + 90 531 685 87 18
- **E-MAİL** : bilgi@akiskablo.com
- **WEB** : www.akiskablo.com.tr
- **Place :**Şerif Ali Mahallesi Türker Caddesi No:41 Ümraniye/İSTANBUL/TURKIYE
- **TEL** : +90 216 314 61 00 (pbx)
- **FAX** : +90 216 314 42 11